

AIR CONTROL UNIT

AA-2252-04

1/2" FRL unit

AA-2252-03

3/8" FRL unit

AA-2252-02

1/4" FRL unit



AA-2352-04

1/2" FRL unit

AA-2352-03

3/8" FRL unit

AA-2352-02

1/4" FRL unit



AA-2252FR-04

1/2" Air Regulator / Filter

AA-2252FR-03

3/8" Air Regulator / Filter

AA-2252FR-02

1/4" Air Regulator / Filter



AA-2252F-04

1/2" Air Filter

AA-2252F-03

3/8" Air Filter

AA-2252F-02

1/4" Air Filter



AA-2252L-04

1/2" Air Lubricator

AA-2252L-03

3/8" Air Lubricator

AA-2252L-02

1/4" Air Lubricator



AA-2252R-04

1/2" Air Regulator

AA-2252R-03

3/8" Air Regulator

AA-2252R-02




1/4" Air Regulator



Features:

- ◆ Heavy duty type - High air flow and drain capacity.
- ◆ Transparent water level indicator for easy checking.
- ◆ Accurate and easy pressure setting.
- ◆ PC & Nylon bowl and aluminum bowl provide excellent protection in organic chemistry working environments.

Flow feature

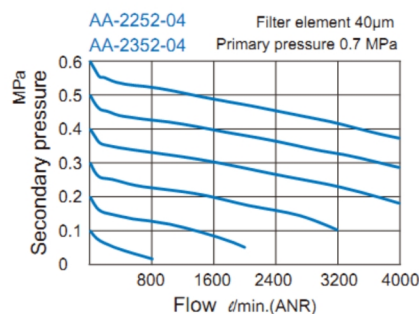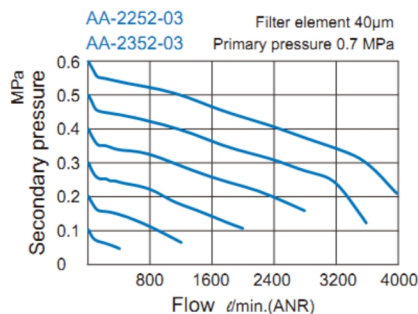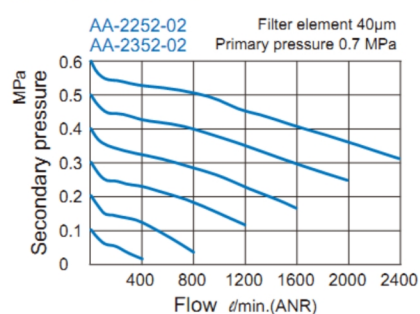

Model No.	Port Size	Regulated Pressure Range	Operating Pressure Range	Filter Element (µm)	Temp. Range	Standard Drain	Lubricator oil	Weight		Packing Pcs/Ctn/G.W/Cuft (kg)	Lubricator Bowl Capacity (cc)
								lb	kg		
AA-2252-02	1/4"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	2.4	1.1	20/Ctn/27 kg/3.68'	200
AA-2252-03	3/8"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	2.4	1.1	20/Ctn/27 kg/3.68'	200
AA-2252-04	1/2"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	2.4	1.1	20/Ctn/27 kg/3.68'	200
AA-2352-02	1/4"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	3.1	1.4	12/Ctn/23 kg/3.68'	200
AA-2352-03	3/8"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	3.1	1.4	12/Ctn/23 kg/3.68'	200
AA-2352-04	1/2"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	3.1	1.4	12/Ctn/23 kg/3.68'	200

(Standard unit contains semi-auto-drain function when operating pressure below 0.5 Bar.)

AIR CONTROL UNIT

AA-2253-08

1" FRL unit

AA-2253-06

3/4" FRL unit



AA-2353-08

1" FRL unit

AA-2353-06

3/4" FRL unit



AA-2253FR-08

1" Air Regulator / Filter

AA-2253FR-06

3/4" Air Regulator / Filter



AA-2253F-08



1" Air Filter

AA-2253F-06

3/4" Air Filter



Flow feature

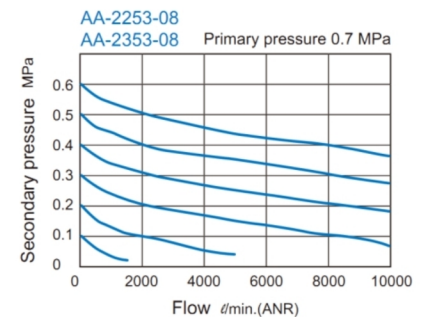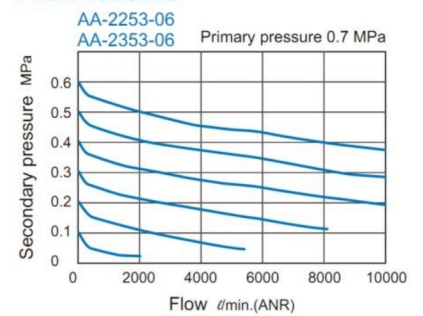

AA-2253L-08

1" Air Lubricator

AA-2253L-06

3/4" Air Lubricator



AA-2253R-08

1" Air Regulator

AA-2253R-06

3/4" Air Regulator



Model No.	Port Size	Regulated Pressure Range	Operating Pressure Range	Filter Element (μm)	Temp. Range	Standard Drain	Lubricator oil	Weight		Packing Pcs/Ctn/G.W/Cuft (kg)	Lubricator Bowl Capacity (cc)
								lb	kg		
AA-2253-06	3/4"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	7.4	3.4		200
AA-2253-08	1"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	7.4	3.4		200
AA-2353-06	3/4"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	9.0	4.1		200
AA-2353-08	1"	0.5-8.5 Bar	0.5-10 Bar	40	-5~60°C	Semi-automatic drain	ISO VG-32	9.0	4.1		200

(Standard unit contains semi-auto-drain function when operating pressure below 0.5 Bar.)