


# FRAMING NAILER

**AT-3095PH** 21° Round head framing nailer



## Plastic strip nails

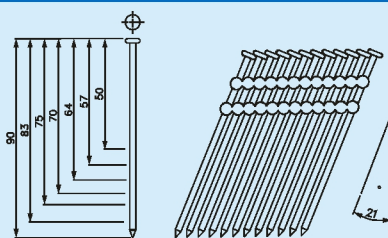

Smooth Shank : H2.87mm × Nail Length : 50~75S  
 H3.05mm × Nail Length : 70~90S  
 H3.33mm × Nail Length : 75~90S


Ring Shank : H2.87mm × Nail Length : 50~75R  
 H3.05mm × Nail Length : 70~83R  
 H3.33mm × Nail Length : 75~83R

Screw Shank : H2.87mm × Nail Length : 50~75C  
 H3.05mm × Nail Length : 70~83C  
 H3.33mm × Nail Length : 75~83C

**AT-3095** 28° Clipped head framing nailer



## Paper strip nails

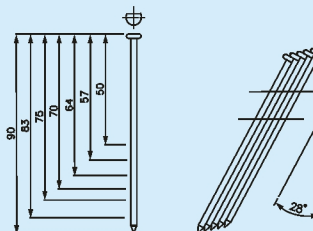

Smooth Shank : 2.87mm × Nail Length : 50~75S  
 3.05mm × Nail Length : 70~90S  
 3.33mm × Nail Length : 75~90S


Ring Shank : 2.87mm × Nail Length : 50~75R  
 3.05mm × Nail Length : 70~83R  
 3.33mm × Nail Length : 75~83R

Screw Shank : 2.87mm × Nail Length : 50~75C  
 3.05mm × Nail Length : 70~83C  
 3.33mm × Nail Length : 75~83C

**AT-3095PA** 34° Clipped head framing nailer



## Paper strip nails

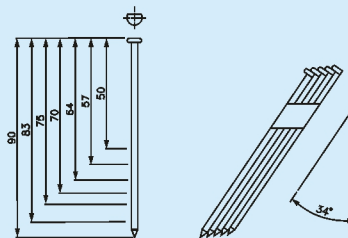

Smooth Shank : A2.87mm × Nail Length : 50~75S  
 A3.05mm × Nail Length : 70~90S  
 A3.33mm × Nail Length : 75~90S

Ring Shank : A2.87mm × Nail Length : 50~75R  
 A3.05mm × Nail Length : 70~83R  
 A3.33mm × Nail Length : 75~83R

Screw Shank : A2.87mm × Nail Length : 50~75C  
 A3.05mm × Nail Length : 70~83C  
 A3.33mm × Nail Length : 75~83C

### Features

1. Narrow nose for accurate fastener placement.
2. Strong and lightweight magnesium die casting body.
3. Contact trip safety.
4. Ergonomic/ overmolded cushion handle grip.
5. Fast Top loading.


### Application

1. Framing
2. Decking
3. Strapping
4. Subflooring
5. Sheathing & exterior
6. Trusses & bridging



Model No.	Fastener				Tool Specification								Load Capacity
	Head	Shank Dia. inch (mm)	Length inch (mm)	Angle	Length		Height		Weight		Pressure		
					mm	inch	mm	inch	kg	lb	psi	kg/cm <sup>2</sup>	
<b>AT-3095PH</b>	Round	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	21°	545	21.46	350	13.78	3.7	8.14	70~110	5~7.5	56~70
<b>AT-3095</b>	Clipped	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	28°	478	18.82	350	13.78	3.7	8.14	70~110	5~7.5	75~105
<b>AT-3095PA</b>	Clipped	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	34°	468	18.43	350	13.78	3.7	8.14	70~110	5~7.5	75~105

# COIL NAILER


## AT-3090 Roofing coil nailer

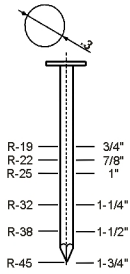


## AT-3091 23/57 Coil nailer AT-3093 25/65 Coil nailer




## AT-3092 29/75 Coil nailer




## AT-3094 33/90 Coil nailer



## AT-3291 33/100 Coil nailer



## AT-3292 38/130 Coil nailer



### Features

1. Strong and lightweight die casting body.
2. 360° adjustable exhaust port.
3. Fast, Easy top loading.
4. Contact trip safety


### Application

1. Roofing felt
2. Tar paper
3. Upholstery panels
4. Create pallet
5. Sheathing
6. Wood assembly

Model No.	Fastener			Tool Specification								Load Capacity
	Head Dia. mm	Shank Dia. inch (mm)	Length inch (mm)	Length		Height		Weight		Pressure		
				mm	inch	mm	inch	kg	lb	psi	kg/cm <sup>2</sup>	
AT-3090	10	0.122"(3.1)	3/4"(19)~1-3/4"(45)	300	11.8	255	10.0	2.40	5.3	70-110	5-7.5	200~300
AT-3091	5.0~6.0	0.083"(2.1)~0.091"(2.3)	1"(25)~2-1/4"(57)	300	11.8	310	12.2	2.20	4.9	70-110	5-7.5	200~300
AT-3092	5.7~7.0	0.091"(2.3)~0.11"(2.9)	1-3/4"(45)~3"(75)	315	12.4	340	13.4	3.86	8.5	70-110	5-7.5	150~300
AT-3093	5.0~6.0	0.091"(2.3)~0.099"(2.5)	1-1/4"(32)~2-1/2"(65)	300	11.8	330	13.0	2.30	5.1	70-110	5-7.5	200~300
AT-3094	6.0~7.2	0.099"(2.5)~0.131"(3.3)	2"(50)~3-1/2"(90)	320	12.6	370	14.6	4.10	9.0	70-110	5-7.5	150~300
AT-3291	6.0~7.2	0.099"(2.5)~0.131"(3.3)	2"(50)~4"(100)	380	15.0	390	15.4	5.30	11.7	70-110	5-7.5	200~300
AT-3292	7.5~8.6	0.12"(3.05)~0.15"(3.8)	3"(75)~5-1/8"(130)	360	14.2	467	18.4	6.40	14.1	70-110	5-7.5	120~225




## AT-3075S 15GA., 2-1/2" Angle finish nailer

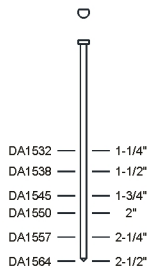


Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> <li>3. Quick-released cover for easy jam removal.</li> <li>4. Adjustable depth of drive for precision nailing.</li> </ol>	<ol style="list-style-type: none"> <li>1. Furniture manufacturing</li> <li>2. Paneling</li> <li>3. Window &amp; door manufacturing</li> <li>4. Trim work</li> <li>5. Hardwood flooring</li> </ol>

## AT-3011 18GA., 1-1/4" Brad nailer




Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> </ol>	<ol style="list-style-type: none"> <li>1. Book cases</li> <li>2. Picture frames</li> <li>3. Furniture repair</li> <li>4. Paneling</li> <li>5. Cabinets</li> </ol>

## AT-3020 16GA., 2" Finish nailer




Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> <li>3. Quick-released cover for easy jam removal.</li> <li>4. Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>1. Window &amp; door casing</li> <li>2. Exterior finish trim</li> <li>3. Crown moulding</li> <li>4. Decorative trim</li> <li>5. Cabinet face frames</li> </ol>

## AT-3012 18GA., 2" Brad nailer

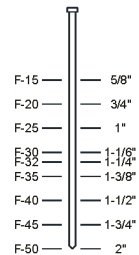


Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> <li>3. Quick released cover for easy jam removal.</li> <li>4. Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>1. Book cases</li> <li>2. Drawers</li> <li>3. Window bedding</li> <li>4. Paneling</li> <li>5. Cabinets</li> </ol>

## AT-3070 16GA., 2-1/2" Finish nailer



Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> <li>3. Quick-released cover for easy jam removal.</li> <li>4. Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>1. Window &amp; door casing</li> <li>2. Exterior finish trim</li> <li>3. Crown moulding</li> <li>4. Decorative trim</li> <li>5. Cabinet face frames</li> </ol>


## AT-3014 Air Corrugated Nailer

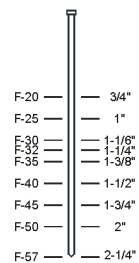

Features	Application
<ol style="list-style-type: none"> <li>1. Strong and lightweight die casting body.</li> <li>2. 360° adjustable exhaust port.</li> <li>3. Comfortable handle with rubber</li> <li>4. Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>1. Book cases</li> <li>2. Drawers</li> <li>3. Window bedding</li> <li>4. Paneling</li> <li>5. Cabinets</li> </ol>


Model No.	Fastener						Tool Specification								Magazine Capacity	
	Gauge	Thickness		Width		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi		kg/cm <sup>2</sup>
AT-3011	18	1.0	0.040	1.25	0.05	10-32	3/8 ~ 1-1/4	235	9.3	190	7.5	1.10	2.42	60-100	4-7	100
AT-3012	18	1.0	0.040	1.25	0.05	15-50	5/8 ~ 2	243	9.6	247	9.7	1.42	3.13	60-100	4-7	100
AT-3014	18	1.0	0.040	1.25	0.05	20-57	3/4 ~ 2-1/4	250	9.8	247	9.7	1.50	3.31	60-100	4-7	100
AT-3020	16	1.4	0.055	1.6	0.063	20-50	3/4 ~ 2	310	12.2	260	10.2	2.18	4.80	60-100	4-7	100
AT-3070	16	1.4	0.055	1.6	0.063	20-64	3/4 ~ 2-1/2	330	13.0	317	12.5	2.56	5.64	60-100	4-7.5	100
AT-3075S	15	1.8	0.070	1.8	0.07	32-64	1-1/4 ~ 2-1/2	300	11.8	310	12.2	2.29	5.00	70-110	5-7.5	100

## AT-3080 13GA., Concrete Nailer

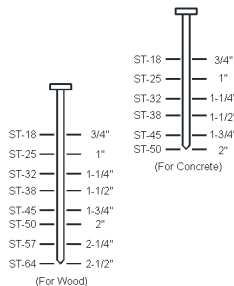


Features	Application
<ol style="list-style-type: none"> <li>360° adjustable exhaust port.</li> <li>Fast and easy side loading</li> <li>Comfortable handle with rubber.</li> <li>Strong &amp; lightweight die cast body.</li> </ol>	<ol style="list-style-type: none"> <li>Concrete</li> <li>Trackless carpet strip</li> <li>Floor underlay</li> <li>Installation of matel drywall track</li> <li>Carpet edge moulding</li> </ol>

## AT-3084 23GA., 7/8" Headless pinner




Features	Application
<ol style="list-style-type: none"> <li>Strong and lightweight die casting body.</li> <li>360° adjustable exhaust port.</li> </ol>	<ol style="list-style-type: none"> <li>Book cases</li> <li>Picture frames</li> <li>Furniture repair</li> <li>Paneling</li> <li>Cabinets</li> </ol>

## AT-3016 18GA., 1-1/4" 2 in 1 Brad nailer & stapler

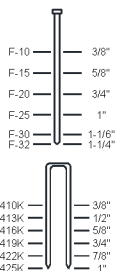


Features	Application
<ol style="list-style-type: none"> <li>Fast and easy side loading</li> <li>360° adjustable exhaust port.</li> <li>No mar pad and thin nose</li> <li>Adjustable driver length.</li> </ol>	<ol style="list-style-type: none"> <li>Furniture repair</li> <li>Cabinets</li> <li>small trim</li> <li>Chair rail</li> <li>Baseboards</li> </ol>

## AT-3086 23GA., 1-1/4" Headless pinner




Features	Application
<ol style="list-style-type: none"> <li>Strong and lightweight die casting body.</li> <li>360° adjustable exhaust port.</li> <li>Quick released cover for easy jam removal.</li> <li>Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>Book cases</li> <li>Drawers</li> <li>Window bedding</li> <li>Paneling</li> <li>Cabinets</li> </ol>

## AT-3015 18GA., 2" 2 in 1 Brad nailer & staple

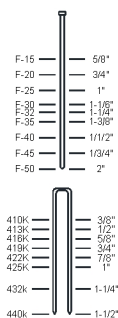

Features	Application
<ol style="list-style-type: none"> <li>Fast and easy side loading</li> <li>360° adjustable exhaust port.</li> <li>No mar pad and thin nose</li> <li>Adjustable driver length.</li> </ol>	<ol style="list-style-type: none"> <li>Furniture repair</li> <li>Cabinets</li> <li>small trim</li> <li>Chair rail</li> <li>Baseboards</li> </ol>

## AT-3081 Corrugate Nailer

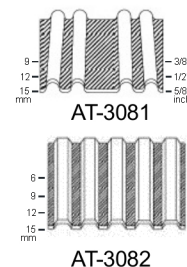

Features	Application
<ol style="list-style-type: none"> <li>Strong and lightweight die casting body.</li> <li>360° adjustable exhaust port.</li> <li>Adjustable depth control.</li> </ol>	<ol style="list-style-type: none"> <li>Furniture, Bedding,</li> <li>Ticking (Flange) to Innerspring</li> <li>Novelty</li> <li>Components</li> </ol>

Model No.	Fastener							Tool Specification							Magazine Capacity	
	Gauge	Thickness		Width		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi		kg/cm <sup>2</sup>
AT-3015	18	1.0	0.040	1.25	0.050	20-50	3/4~2	265	10.4	247	9.70	1.40	3.09	60-100	4-7	100
AT-3016	18	1.0	0.040	1.25	0.050	10-32	3/8~1-1/4	263	10.4	200	7.90	1.16	2.56	60-100	4-7	100
AT-3080	13	2.5	0.098	2.50	0.098	25-64	1~2-1/2	305	12.0	305	12.00	2.35	5.18	60-100	4-7	80
AT-3081	-	2.2	0.087	26.4	1.040	9-15	3/8~5/8	380	15.0	288	11.30	2.74	6.04	60-100	4-7	180
AT-3082	-	2.2	0.087	25.4	1.000	9-15	3/8~5/8	380	15.0	288	11.30	2.74	6.04	60-100	4-7	160
AT-3084	23	0.64	0.025	0.64	0.025	12-22	1/2~7/8	225	8.86	152	5.98	1.00	2.20	60-90	4-6.3	200
AT-3086	23	0.64	0.025	0.64	0.025	12-30	1/2~1-1/4	227	8.90	186	7.30	0.86	1.90	60-100	4-7	200





## AT-3060S

16GA., Wide crown stapler

## AT-3060B

16GA., Wide crown stapler





## AT-3050S

16GA., 7/16" Medium crown stapler

## AT-3050B

16GA., 1/2" Medium crown stapler



### Features

1. Strong and lightweight die casting body.
2. 360 degree adjustable exhaust port.
3. Fast easy top loading.
4. Adjustable driver length.

### Application

1. Drawer assembly
2. Cabinets
3. Casebacks
4. Crafts
5. Bed frames
6. Picture frames

### Features

1. Strong and lightweight die casting body.
2. 360 degree adjustable exhaust port.
3. Fast easy top loading.
4. Adjustable driver length.

### Application


1. Drawer assembly
2. Cabinets
3. Picture frames
4. Crafts
5. Bed frames

## AT-3030

18GA., 1/4" Narrow crown stapler


## AT-3041

18GA., 1/4" Narrow crown stapler



## AT-3038

18 GA., 1/3" Crown Stapler



### Features

1. 360° adjustable exhaust port.
2. Combination trigger.
3. Quick top loading magazine.
4. Comfortable handle with rubber.
5. Strong & lightweight die cast body.

### Application

1. Drawers
2. Paneling
3. Flower boxes
4. Cabinet work
5. Door & window casting
6. Book case
7. Wooden toys

### Features

1. 360 degree adjustable exhaust port.
2. Fast and easy Upper loading.
3. Comfortable handle with rubber.
4. Strong & lightweight die cast body.
5. Adjustable driver length


### Application

1. Drawer assembly
2. Cabinet
3. Casebacks
4. Picture frames
5. Bed frames
6. Crafts


Model No.	Fastener								Tool Specification							Magazine Capacity		
	Gauge	Thickness		Width		Crown		Length		Length		Height	Weight		Pressure			
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb		psi	kg/cm <sup>2</sup>
AT-3030	18	1.0	0.04	1.25	0.05	5.80	0.23	16~40	5/8~1-1/2	330	13.0	262	10.3	2.0	4.4	60-100	4-7	160
AT-3038	18	1.0	0.04	1.25	0.05	8.70	0.34	19~40	3/4~1-1/2	330	13.0	262	10.3	2.0	4.4	60-100	4-7	160
AT-3041	18	1.0	0.04	1.25	0.05	5.80	0.23	10~25	3/8~1	250	9.80	174	6.85	1.2	2.64	60-100	4-7	100
AT-3050S	16	1.4	0.06	1.60	0.06	11.10	0.44	20~50	3/4~2	385	15.2	289	11.4	2.4	5.3	60-100	4-7	150
AT-3050B	16	1.4	0.06	1.60	0.06	12.25	0.5	20~50	3/4~2	385	15.2	289	11.4	2.4	5.3	60-100	4-7	150
AT-3060S	16	1.4	0.06	1.60	0.06	26.40	1.04	22~38	7/8~1-1/2	325	12.8	300	11.8	2.5	5.5	60-100	4-7	140
AT-3060B	16	1.4	0.06	1.60	0.06	25.00	0.98	22~38	7/8~1-1/2	325	12.8	300	11.8	2.5	5.5	60-100	4-7	140

# STAPLER

**AT-3000**  
20GA., Narrow crown stapler  
**AT-3025**  
20GA., Narrow crown stapler




**AT-3001**  
20GA., Medium crown stapler  
**AT-3007**  
20GA., Medium crown stapler




Features	Application
<ol style="list-style-type: none"> <li>1. Combination trigger.</li> <li>2. Easy loading magazine.</li> <li>3. Comfortable handle with rubber.</li> <li>4. Strong &amp; lightweight die cast body.</li> </ol>	<ol style="list-style-type: none"> <li>1. Drawers</li> <li>2. Paneling</li> <li>3. Flower boxes</li> <li>4. Cabinet work</li> <li>5. Door &amp; window casting</li> <li>6. Book case</li> <li>7. Wooden toys</li> </ol>

Features	Application
<ol style="list-style-type: none"> <li>1. Combination trigger.</li> <li>2. Easy loading magazine.</li> <li>3. Comfortable handle with rubber.</li> <li>4. Strong &amp; lightweight die cast body.</li> </ol>	<ol style="list-style-type: none"> <li>1. Drawers</li> <li>2. Paneling</li> <li>3. Flower boxes</li> <li>4. Cabinet work</li> <li>5. Door &amp; window casting</li> <li>6. Book case</li> <li>7. Wooden toys</li> </ol>

**AT-3033**  
21GA., Fine wire stapler



**AT-3008**  
22GA., Fine wire stapler



Features	Application
<ol style="list-style-type: none"> <li>1. Extra large cylinder design more powerful.</li> <li>2. Easy loading magazine.</li> <li>3. High capacity magazine means less time is spent on reloading.</li> <li>4. Ergonomically design for continuous operation.</li> </ol>	<ol style="list-style-type: none"> <li>1. Cabinet</li> <li>2. Furniture</li> <li>3. Construction</li> <li>4. Upholstery work</li> <li>5. Other kinds of fastening work.</li> </ol>

Features	Application
<ol style="list-style-type: none"> <li>1. Extra large cylinder design more powerful.</li> <li>2. Easy loading magazine.</li> <li>3. High capacity magazine means less time is spent on reloading.</li> <li>4. Ergonomically design for continuous operation.</li> </ol>	<ol style="list-style-type: none"> <li>1. Cabinet</li> <li>2. Furniture</li> <li>3. Construction</li> <li>4. Upholstery work</li> <li>5. Other kinds of fastening work.</li> </ol>

Model No.	Fastener									Tool Specification							Magazine Capacity	
	Gauge	Thickness		Width		Crown		Length		Length	Height		Weight		Pressure			
		mm	inch	mm	inch	mm	inch	mm	inch		mm	inch	kg	lb	psi	kg/cm <sup>2</sup>		
<b>AT-3000</b>	20	0.6	0.024	1.20	0.050	5.2	0.21	10~22	3/8~7/8	225	8.9	181	7.1	1.0	2.2	60-100	4-7	100
<b>AT-3001</b>	20	0.6	0.020	1.20	0.030	11.2	0.44	10~22	3/8~7/8	223	8.8	180	7.1	1.16	2.56	60-100	4-7	100
<b>AT-3007</b>	20	0.6	0.020	1.20	0.050	11.2	0.44	10~25	3/8~1	230	9.1	180	7.1	1.2	2.6	60-100	4-7	100
<b>AT-3008</b>	22	0.6	0.024	0.75	0.030	9.1	0.358	4~16	5/32~5/8	224	8.8	156	6.1	0.84	1.85	60-100	4-7	200
<b>AT-3025</b>	20	0.6	0.024	1.20	0.050	5.2	0.21	10~25	3/8~1	230	9.1	181	7.1	1.1	2.42	60-100	4-7	100
<b>AT-3033</b>	21	0.65	0.026	0.95	0.037	12.9	0.508	6~16	1/4~5/8	224	8.8	156	6.1	0.84	1.85	60-100	4-7	160