

# GREASE GUN



**AT-6139**  
Air Spray-Coating grease gun  
(400ml/14oz)

**AT-6139L**  
Air Spray-Coating grease gun  
(500ml/16oz)



**AT-6139E**  
Air Spray-Coating grease gun with  
extended extension (400ml/14oz)

**AT-6139EL**  
Air Spray-Coating grease gun with  
extended extension (500ml/16oz)



**AT-6037**  
Continuous shot air grease gun  
(400ml/14oz)



**AT-6038**  
Composite air grease gun  
(400ml/14oz)

**AT-6038L**  
Composite air grease gun  
(500ml/16oz)



**AT-6138**  
Composite continuous shot  
air grease gun (400ml/14oz)

**AT-6138L**  
Composite continuous shot  
air grease gun (500ml/16oz)



**AT-6036**  
Air grease gun (400ml/14oz)

**AT-6036L**  
Air grease gun (500ml/16oz)



**HT-6136**  
Lever grease gun



**HT-6039**  
Mini grease gun



**HT-6038**  
Mini grease gun



**HT-6037**  
Mini grease gun



**HT-6138**  
Grip type grease gun



| Model No. | Capacity |           | Grease Port Outlet (NPT) | Air Inlet (PT) | Air Hose (ID) | Output Pressure (psi) | Output Volume (ml/min.) | Output Volume (ml/stroke) | Net Weight |      | Working Air Pressure |                    | Packing (Pcs/Ctn/G.W./Cuft) | Sug. Air Comp. (HP) |
|-----------|----------|-----------|--------------------------|----------------|---------------|-----------------------|-------------------------|---------------------------|------------|------|----------------------|--------------------|-----------------------------|---------------------|
|           | Bulk     | Cartridge |                          |                |               |                       |                         |                           | lb         | kg   | psi                  | kg/cm <sup>2</sup> |                             |                     |
| AT-6036   | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | -                       | 1.30                      | 3.09       | 1.40 | 90                   | 6.3                | 10/Ctn/17.7 kg/2.2'         | 1                   |
| AT-6036L  | 500ml    | 16oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | -                       | 1.30                      | 3.31       | 1.50 | 90                   | 6.3                | 10/Ctn/18.0 kg/2.6'         | 1                   |
| AT-6037   | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 3.53       | 1.60 | 90                   | 6.3                | 10/Ctn/18.9 kg/2.2'         | 1                   |
| AT-6038   | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | -                       | 1.30                      | 2.20       | 1.00 | 90                   | 6.3                | 10/Ctn/14 kg/2.5'           | 1                   |
| AT-6038L  | 500ml    | 16oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | -                       | 1.30                      | 2.20       | 1.00 | 90                   | 6.3                | 10/Ctn/14 kg/2.5'           | 1                   |
| AT-6139   | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 3.68       | 1.67 | 90                   | 6.3                | 4/Ctn/8 kg/2.4'             | 2                   |
| AT-6139E  | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 4.01       | 1.82 | 90                   | 6.3                | 4/Ctn/8.5 kg/2.4'           | 2                   |
| AT-6139EL | 500ml    | 16oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 3.95       | 1.79 | 90                   | 6.3                | 4/Ctn/8.5 kg/2.4'           | 2                   |
| AT-6139L  | 500ml    | 16oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 4.30       | 1.95 | 90                   | 6.3                | 4/Ctn/9 kg/2.4'             | 2                   |
| AT-6138   | 400ml    | 14oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 2.20       | 1.00 | 90                   | 6.3                | 10/Ctn/14 kg/2.5'           | 1                   |
| AT-6138L  | 500ml    | 16oz      | 1/8"                     | 1/4"           | 3/8"          | 3600                  | 200                     | -                         | 2.20       | 1.00 | -                    | -                  | 10/Ctn/14 kg/2.5'           | 1                   |
| HT-6037   | 80ml     | -         | 1/8"                     | -              | -             | 1000                  | -                       | 0.20                      | 0.62       | 0.28 | -                    | -                  | 50/Ctn/15 kg/1.4'           | -                   |
| HT-6038   | -        | 100ml     | 1/8"                     | -              | -             | 1000                  | -                       | 0.20                      | 0.40       | 0.18 | -                    | -                  | 50/Ctn/12 kg/1.8'           | -                   |
| HT-6039   | -        | 100ml     | 1/8"                     | -              | -             | 1000                  | -                       | 0.45                      | 0.23       | 0.10 | -                    | -                  | 50/Ctn/12 kg/1.8'           | -                   |
| HT-6136   | 400ml    | 14oz      | 1/8"                     | -              | -             | 8000                  | -                       | 0.80                      | 2.47       | 1.12 | -                    | -                  | 10/Ctn/13 kg/1.8'           | -                   |
| HT-6138   | 400ml    | 14oz      | 1/8"                     | -              | -             | 4300                  | -                       | 0.80                      | 2.93       | 1.33 | -                    | -                  | 12/Ctn/12 kg/1.8'           | -                   |

# AIR CAULKING GUN / AIR PRUNING SHEAR



## AT-6040

Air caulking gun (for cartridge)



## AT-6044

Air caulking gun (for sachet)



## AT-6046

Air caulking gun (for sachet)



## AT-6001

Air Pruning Shear




## AT-6001M

Extendable Air Pruning Shear



## AT-6001L

Telescopic Air Pruning Shear

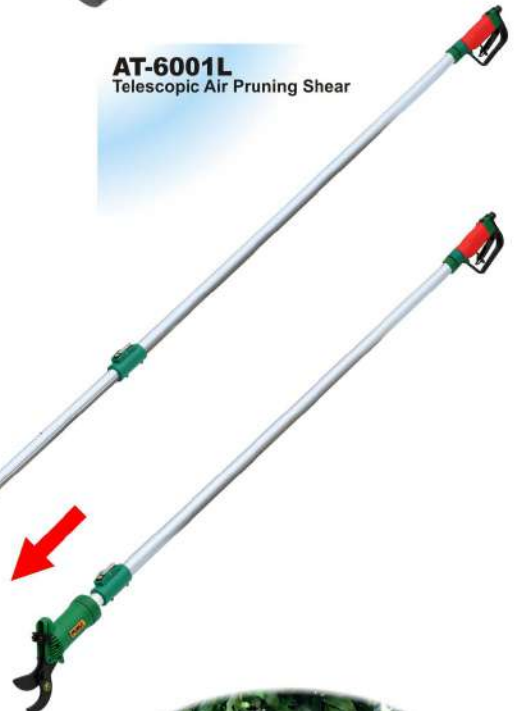

### Features:

- Durable construction delivers long hours of cutting power.
- Light weight and easy operation.
- An unique safety lock associated with safety trigger preventing accident start-up.
- Forged blades for long last cutting.
- Telescopic extension pole for longer reach.

| Model No. | Bore<br>x<br>Tube Length | Capacity<br>ml | Overall<br>Length |     | Air<br>Inlet<br>(PT) | Air<br>Hose<br>(ID) | Avg. Air<br>Consumption |       | Net<br>Weight |      | Working<br>Air Pressure |                    | Packing<br>Pcs/Ctn/G.W/Cuft<br>(kg) | Sug.<br>Air<br>Comp.<br>(HP) |
|-----------|--------------------------|----------------|-------------------|-----|----------------------|---------------------|-------------------------|-------|---------------|------|-------------------------|--------------------|-------------------------------------|------------------------------|
|           |                          |                | inch              | mm  |                      |                     | scfm                    | l/min | lb            | kg   | psi                     | kg/cm <sup>2</sup> |                                     |                              |
| AT-6040   | Ø2"x 9"                  | 310            | 12.00             | 305 | 1/4"                 | 1/4"                | 2                       | 56    | 2.40          | 1.10 | 30~40                   | 2~3                | 10/Ctn/14.5 kg/1.6'                 | 0.5                          |
| AT-6044   | Ø2"x 9"                  | 310            | 13.56             | 345 | 1/4"                 | 1/4"                | 2                       | 56    | 3.31          | 1.50 | 30~60                   | 2~4                | 10/Ctn/17 kg/1.4'                   | 0.5                          |
| AT-6046   | Ø2"x13"                  | 600            | 17.72             | 450 | 1/4"                 | 1/4"                | 2                       | 56    | 4.19          | 1.90 | 30~60                   | 2~4                | 6/Ctn/14 kg/1.3'                    | 0.5                          |

| Model No. | Cutting Capacity |    | Overall<br>Length |           | Air<br>Inlet<br>(PT) | Air<br>Hose<br>(ID) | Avg. Air<br>Consumption<br>L/cycle | Net<br>Weight |      | Packing<br>Pcs/Ctn/G.W/Cuft<br>(kg) | Sug.<br>Air<br>Comp.<br>(HP) |
|-----------|------------------|----|-------------------|-----------|----------------------|---------------------|------------------------------------|---------------|------|-------------------------------------|------------------------------|
|           | inch             | mm | inch              | mm        |                      |                     |                                    | lb            | kg   |                                     |                              |
| AT-6001   | 1                | 25 | 10.63             | 270       | 1/4"                 | 1/4"                | 0.073                              | 1.50          | 0.68 | 10/Ctn/9 kg/1.0'                    | 1                            |
| AT-6001M  | 1                | 25 | 39.37             | 1000      | 1/4"                 | 1/4"                | 0.073                              | 2.56          | 1.16 | 4/Ctn/8 kg/1.8'                     | 1                            |
| AT-6001L  | 1                | 25 | 71.65~118.1       | 1820~3000 | 1/4"                 | 1/4"                | 0.073                              | 3.75          | 1.70 | 4/Ctn/10.5 kg/3.4'                  | 1                            |