

FRAMING NAILER

AT-3095PH 21° Round head framing nailer




AT-3095 28° Clipped head framing nailer



AT-3095PA 34° Clipped head framing nailer




Plastic strip nails

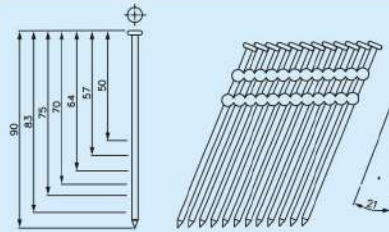


Smooth Shank : H2.87mm × Nail Length : 50~75S
 H3.05mm × Nail Length : 70~90S
 H3.33mm × Nail Length : 75~90S
 Ring Shank : H2.87mm × Nail Length : 50~75R
 H3.05mm × Nail Length : 70~83R
 H3.33mm × Nail Length : 75~83R
 Screw Shank : H2.87mm × Nail Length : 50~75C
 H3.05mm × Nail Length : 70~83C
 H3.33mm × Nail Length : 75~83C

Paper strip nails



Smooth Shank : 2.87mm × Nail Length : 50~75S
 3.05mm × Nail Length : 70~90S
 3.33mm × Nail Length : 75~90S
 Ring Shank : 2.87mm × Nail Length : 50~75R
 3.05mm × Nail Length : 70~83R
 3.33mm × Nail Length : 75~83R
 Screw Shank : 2.87mm × Nail Length : 50~75C
 3.05mm × Nail Length : 70~83C
 3.33mm × Nail Length : 75~83C

Paper strip nails

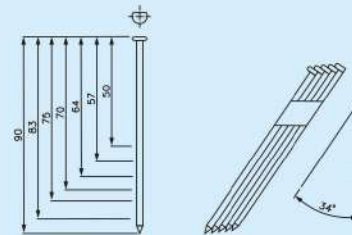

Smooth Shank : A2.87mm × Nail Length : 50~75S
 A3.05mm × Nail Length : 70~90S
 A3.33mm × Nail Length : 75~90S
 Ring Shank : A2.87mm × Nail Length : 50~75R
 A3.05mm × Nail Length : 70~83R
 A3.33mm × Nail Length : 75~83R
 Screw Shank : A2.87mm × Nail Length : 50~75C
 A3.05mm × Nail Length : 70~83C
 A3.33mm × Nail Length : 75~83C

Features

1. Narrow nose for accurate fastener placement.
2. Strong and lightweight magnesium die casting body.
3. Contact trip safety.
4. Ergonomic/ overmolded cushion handle grip.
5. Fast Top loading.


Application

1. Framing
2. Decking
3. Strapping
4. Subflooring
5. Sheathing & exterior
6. Trusses & bridging


Model No.	Fastener				Tool Specification								Load Capacity
	Head	Shank Dia. inch (mm)	Length inch (mm)	Angle	Length		Height		Weight		Pressure		
					mm	inch	mm	inch	kg	lb	psi	kg/cm ²	
AT-3095PH	Round	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	21°	545	21.46	350	13.78	3.7	8.14	70-110	5-7.5	56~70
AT-3095	Clipped	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	28°	478	18.82	350	13.78	3.7	8.14	70-110	5-7.5	75~105
AT-3095PA	Clipped	0.113(2.87)~0.131(3.33)	2"(50)~3-1/2"(90)	34°	468	18.43	350	13.78	3.7	8.14	70-110	5-7.5	75~105

COIL NAILER


AT-3090
Roofing coil nailer




AT-3091
23/57 Coil nailer
AT-3093
25/65 Coil nailer




AT-3092
29/75 Coil nailer




AT-3094
33/90 Coil nailer



AT-3291
33/100 Coil nailer



AT-3292
38/130 Coil nailer



Features

1. Strong and lightweight die casting body.
2. 360° adjustable exhaust port.
3. Fast, Easy top loading.
4. Contact trip safety

Application

1. Roofing felt
2. Tar paper
3. Upholstery panels
4. Create pallet
5. Sheathing
6. Wood assembly

Model No.	Fastener			Tool Specification								Load Capacity
	Head Dia. mm	Shank Dia. inch (mm)	Length inch (mm)	Length mm	inch	Height mm	inch	Weight kg	lb	Pressure psi	kg/cm ²	
AT-3090	10	0.122"(3.1)	3/4"(19)~1-3/4"(45)	300	11.8	255	10.0	2.40	5.3	70-110	5-7.5	200~300
AT-3091	5.0~6.0	0.083"(2.1)~0.091"(2.3)	1"(25)~2-1/4"(57)	300	11.8	310	12.2	2.20	4.9	70-110	5-7.5	200~300
AT-3092	5.7~7.0	0.091"(2.3)~0.11"(2.9)	1-3/4"(45)~3"(75)	315	12.4	340	13.4	3.86	8.5	70-110	5-7.5	150~300
AT-3093	5.0~6.0	0.091"(2.3)~0.099"(2.5)	1-1/4"(32)~2-1/2"(65)	300	11.8	330	13.0	2.30	5.1	70-110	5-7.5	200~300
AT-3094	6.0~7.2	0.099"(2.5)~0.131"(3.3)	2"(50)~3-1/2"(90)	320	12.6	370	14.6	4.10	9.0	70-110	5-7.5	150~300
AT-3291	6.0~7.2	0.099"(2.5)~0.131"(3.3)	2"(50)~4"(100)	380	15.0	390	15.4	5.30	11.7	70-110	5-7.5	200~300
AT-3292	7.5~8.6	0.12"(3.05)~0.15"(3.8)	3"(75)~5-1/8"(130)	360	14.2	467	18.4	6.40	14.1	70-110	5-7.5	120~225

AT-3075S 15GA., 2-1/2" Angle finish nailer



DA1532	1-1/4"
DA1538	1-1/2"
DA1545	1-3/4"
DA1550	2"
DA1557	2-1/4"
DA1564	2-1/2"

Features	Application
1. Strong and lightweight die casting body.	1. Furniture manufacturing
2. 360° adjustable exhaust port.	2. Paneling
3. Quick-released cover for easy jam removal.	3. Window & door manufacturing
4. Adjustable depth of drive for precision nailing.	4. Trim work
	5. Hardwood flooring

AT-3011 18GA., 1-1/4" Brad nailer



F-10	3/8"
F-15	5/8"
F-20	3/4"
F-25	1"
F-30	1-1/8"
F-32	1-1/4"

Features	Application
1. Strong and lightweight die casting body.	1. Book cases
2. 360° adjustable exhaust port.	2. Picture frames
	3. Furniture repair
	4. Paneling
	5. Cabinets

AT-3020 16GA., 2" Finish nailer



T-20	3/4"
T-25	1"
T-32	1-1/4"
T-38	1-1/2"
T-45	1-3/4"
T-50	2"

Features	Application
1. Strong and lightweight die casting body.	1. Window & door casing
2. 360° adjustable exhaust port.	2. Exterior finish trim
3. Quick-released cover for easy jam removal.	3. Crown moulding
4. Adjustable depth control.	4. Decorative trim
	5. Cabinet face frames

AT-3012 18GA., 2" Brad nailer



F-15	5/8"
F-20	3/4"
F-25	1"
F-30	1-1/8"
F-32	1-1/4"
F-35	1-3/8"
F-40	1-1/2"
F-45	1-3/4"
F-50	2"

Features	Application
1. Strong and lightweight die casting body.	1. Book cases
2. 360° adjustable exhaust port.	2. Drawers
3. Quick released cover for easy jam removal.	3. Window bedding
4. Adjustable depth control.	4. Paneling
	5. Cabinets

AT-3070 16GA., 2-1/2" Finish nailer



T-20	3/4"
T-25	1"
T-32	1-1/4"
T-38	1-1/2"
T-45	1-3/4"
T-50	2"
T-57	2-1/4"
T-64	2-1/2"

Features	Application
1. Strong and lightweight die casting body.	1. Window & door casing
2. 360° adjustable exhaust port.	2. Exterior finish trim
3. Quick-released cover for easy jam removal.	3. Crown moulding
4. Adjustable depth control.	4. Decorative trim
	5. Cabinet face frames

AT-3014 Air Corrugated Nail




F-20	3/4"
F-25	1"
F-30	1-1/8"
F-32	1-1/4"
F-35	1-3/8"
F-40	1-1/2"
F-45	1-3/4"
F-50	2"
F-57	2-1/4"

Features	Application
1. Strong and lightweight die casting body.	1. Book cases
2. 360° adjustable exhaust port.	2. Drawers
3. Comfortable handle with rubber	3. Window bedding
4. Adjustable depth control.	4. Paneling
	5. Cabinets


Model No.	Fastener							Tool Specification								Magazine Capacity
	Gauge	Thickness		Width		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi	kg/cm²	
AT-3011	18	1.0	0.040	1.25	0.05	10-32	3/8 ~ 1-1/4	235	9.3	190	7.5	1.10	2.42	60-100	4-7	100
AT-3012	18	1.0	0.040	1.25	0.05	15-50	5/8 ~ 2	243	9.6	247	9.7	1.42	3.13	60-100	4-7	100
AT-3014	18	1.0	0.040	1.25	0.05	20-57	3/4 ~ 2-1/4	250	9.8	247	9.7	1.50	3.31	60-100	4-7	100
AT-3020	16	1.4	0.055	1.6	0.063	20-50	3/4 ~ 2	310	12.2	260	10.2	2.18	4.80	60-100	4-7	100
AT-3070	16	1.4	0.055	1.6	0.063	20-64	3/4 ~ 2-1/2	330	13.0	317	12.5	2.56	5.64	60-100	4-7.5	100
AT-3075S	15	1.8	0.070	1.8	0.07	32-64	1-1/4 ~ 2-1/2	300	11.8	310	12.2	2.29	5.00	70-110	5-7.5	100

AT-3080 13GA., Concrete Nailer




Features	Application
1. 360° adjustable exhaust port. 2. Fast and easy side loading 3. Comfortable handle with rubber. 4. Strong & lightweight die cast body.	1. Concrete 2. Trackless carpet strip 3. Floor underlay 4. Installation of metal drywall track 5. Carpet edge moulding

AT-3084 23GA., 7/8" Headless pinner




Features	Application
1. Strong and lightweight die casting body. 2. 360° adjustable exhaust port.	1. Book cases 2. Picture frames 3. Furniture repair 4. Paneling 5. Cabinets

AT-3016 18GA., 1-1/4" 2 in 1 Brad nailer & stapler




Features	Application
1. Fast and easy side loading 2. 360° adjustable exhaust port. 3. No mar pad and thin nose 4. Adjustable driver length.	1. Furniture repair 2. Cabinets 3. small trim 4. Chair rail 5. Baseboards

AT-3086 23GA., 1-1/4" Headless pinner




Features	Application
1. Strong and lightweight die casting body. 2. 360° adjustable exhaust port. 3. Quick released cover for easy jam removal. 4. Adjustable depth control.	1. Book cases 2. Drawers 3. Window bedding 4. Paneling 5. Cabinets

AT-3015 18GA., 2" 2 in 1 Brad nailer & staple




Features	Application
1. Fast and easy side loading 2. 360° adjustable exhaust port. 3. No mar pad and thin nose 4. Adjustable driver length.	1. Furniture repair 2. Cabinets 3. small trim 4. Chair rail 5. Baseboards

AT-3081 Corrugate Nailer



AT-3082 Corrugate Nailer



Features	Application
1. Strong and lightweight die casting body. 2. 360° adjustable exhaust port. 3. Adjustable depth control.	1. Furniture, Bedding, 2. Ticking (Flange) to Innerspring 3. Novelty 4. Components

Model No.	Fastener							Tool Specification								Magazine Capacity
	Gauge	Thickness		Width		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi	kg/cm²	
AT-3015	18	1.0	0.040	1.25	0.050	20-50	3/4~2	265	10.4	247	9.70	1.40	3.09	60-100	4-7	100
AT-3016	18	1.0	0.040	1.25	0.050	10-32	3/8~1-1/4	263	10.4	200	7.90	1.16	2.56	60-100	4-7	100
AT-3080	13	2.5	0.098	2.50	0.098	25-64	1~2-1/2	305	12.0	305	12.00	2.35	5.18	60-100	4-7	80
AT-3081	-	2.2	0.087	26.4	1.040	9-15	3/8~5/8	380	15.0	288	11.30	2.74	6.04	60-100	4-7	180
AT-3082	-	2.2	0.087	25.4	1.000	9-15	3/8~5/8	380	15.0	288	11.30	2.74	6.04	60-100	4-7	160
AT-3084	23	0.64	0.025	0.64	0.025	12-22	1/2~7/8	225	8.86	152	5.98	1.00	2.20	60-90	4-6.3	200
AT-3086	23	0.64	0.025	0.64	0.025	12-30	1/2~1-1/4	227	8.90	186	7.30	0.86	1.90	60-100	4-7	200


STAPLER

AT-3060S


16GA., Wide crown stapler

AT-3060B

16GA., Wide crown stapler



AT-3060S



AT-3060B


Features	Application
1. Strong and lightweight die casting body.	1. Drawer assembly
2. 360 degree adjustable exhaust port.	2. Cabinets
3. Fast easy top loading.	3. Casebacks
4. Adjustable driver length.	4. Crafts
	5. Bed frames
	6. Picture frames

AT-3050S


16GA., 7/16" Medium crown stapler

AT-3050B

16GA., 1/2" Medium crown stapler



AT-3050S



AT-3050B


Features	Application
1. Strong and lightweight die casting body.	1. Drawer assembly
2. 360 degree adjustable exhaust port.	2. Cabinets
3. Fast easy top loading.	3. Picture frames
4. Adjustable driver length.	4. Crafts
	5. Bed frames

AT-3030

18GA., 1/4" Narrow crown stapler

AT-3041


18GA., 1/4" Narrow crown stapler



Features	Application
1. 360° adjustable exhaust port.	1. Drawers
2. Combination trigger.	2. Paneling
3. Quick top loading magazine.	3. Flower boxes
4. Comfortable handle with rubber.	4. Cabinet work
5. Strong & lightweight die cast body.	5. Door & window casting
	6. Book case
	7. Wooden toys

AT-3038

18 GA., 1/3" Crown Stapler



Features	Application
1. 360 degree adjustable exhaust port.	1. Drawer assembly
2. Fast and easy Upper loading.	2. Cabinet
3. Comfortable handle with rubber.	3. Casebacks
4. Strong & lightweight die cast body.	4. Picture frames
5. Adjustable driver length	5. Bed frames
	6. Crafts


Model No.	Fastener									Tool Specification								Magazine Capacity
	Gauge	Thickness		Width		Crown		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi	kg/cm²	
AT-3030	18	1.0	0.04	1.25	0.05	5.80	0.23	16~40	5/8~1-1/2	330	13.0	262	10.3	2.0	4.4	60-100	4-7	160
AT-3038	18	1.0	0.04	1.25	0.05	8.70	0.34	19~40	3/4~1-1/2	330	13.0	262	10.3	2.0	4.4	60-100	4-7	160
AT-3041	18	1.0	0.04	1.25	0.05	5.80	0.23	10~25	3/8~1	250	9.80	174	6.85	1.2	2.64	60-100	4-7	100
AT-3050S	16	1.4	0.06	1.60	0.06	11.10	0.44	20~50	3/4~2	385	15.2	289	11.4	2.4	5.3	60-100	4-7	150
AT-3050B	16	1.4	0.06	1.60	0.06	12.25	0.5	20~50	3/4~2	385	15.2	289	11.4	2.4	5.3	60-100	4-7	150
AT-3060S	16	1.4	0.06	1.60	0.06	26.40	1.04	22~38	7/8~1-1/2	325	12.8	300	11.8	2.5	5.5	60-100	4-7	140
AT-3060B	16	1.4	0.06	1.60	0.06	25.00	0.98	22~38	7/8~1-1/2	325	12.8	300	11.8	2.5	5.5	60-100	4-7	140

AT-3000

20GA., Narrow crown stapler

AT-3025

20GA., Narrow crown stapler




AT-3001

20GA., Medium crown stapler

AT-3007

20GA., Medium crown stapler




Features	Application
1. Combination trigger.	1. Drawers
2. Easy loading magazine.	2. Paneling
3. Comfortable handle with rubber.	3. Flower boxes
4. Strong & lightweight die cast body.	4. Cabinet work
	5. Door & window casting
	6. Book case
	7. Wooden toys

Features	Application
1. Combination trigger.	1. Drawers
2. Easy loading magazine.	2. Paneling
3. Comfortable handle with rubber.	3. Flower boxes
4. Strong & lightweight die cast body.	4. Cabinet work
	5. Door & window casting
	6. Book case
	7. Wooden toys


AT-3033

21GA., Fine wire stapler



AT-3008

22GA., Fine wire stapler



Features	Application
1. Extra large cylinder design more powerful.	1. Cabinet
2. Easy loading magazine.	2. Furniture
3. High capacity magazine means less time is spent on reloading.	3. Construction
4. Ergonomically design for continuous operation.	4. Upholstery work
	5. Other kinds of fastening work.

Features	Application
1. Extra large cylinder design more powerful.	1. Cabinet
2. Easy loading magazine.	2. Furniture
3. High capacity magazine means less time is spent on reloading.	3. Construction
4. Ergonomically design for continuous operation.	4. Upholstery work
	5. Other kinds of fastening work.

Model No.	Fastener									Tool Specification								Magazine Capacity
	Gauge	Thickness		Width		Crown		Length		Length		Height		Weight		Pressure		
		mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	kg	lb	psi	kg/cm ²	
AT-3000	20	0.6	0.024	1.20	0.050	5.2	0.21	10~22	3/8~7/8	225	8.9	181	7.1	1.0	2.2	60~100	4~7	100
AT-3001	20	0.6	0.020	1.20	0.030	11.2	0.44	10~22	3/8~7/8	223	8.8	180	7.1	1.16	2.56	60~100	4~7	100
AT-3007	20	0.6	0.020	1.20	0.050	11.2	0.44	10~25	3/8~1	230	9.1	180	7.1	1.2	2.6	60~100	4~7	100
AT-3008	22	0.6	0.024	0.75	0.030	9.1	0.358	4~16	5/32~5/8	224	8.8	156	6.1	0.84	1.85	60~100	4~7	200
AT-3025	20	0.6	0.024	1.20	0.050	5.2	0.21	10~25	3/8~1	230	9.1	181	7.1	1.1	2.42	60~100	4~7	100
AT-3033	21	0.65	0.026	0.95	0.037	12.9	0.508	6~16	1/4~5/8	224	8.8	156	6.1	0.84	1.85	60~100	4~7	160