


COMPRESSION RIVETER

AT-2701

Alligator jaw type compression riveter (single cylinder)

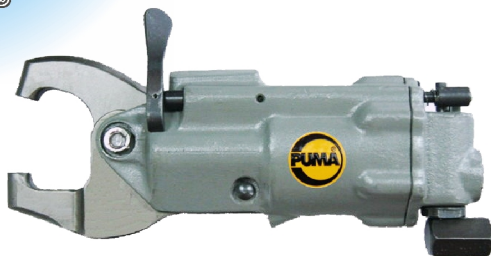

AT-2702

Alligator jaw type compression riveter (tandem cylinder)



AT-2701L

Alligator jaw type compression riveter (single cylinder)



AT-2702L

Alligator jaw type compression riveter (tandem cylinder)



AT-2703

C-Yoke type compression riveter (single cylinder)



(w/o yoke)

AT-2704

C-Yoke type compression riveter (tandem cylinder)



(w/o yoke)



A TYPE




B TYPE



C TYPE



D TYPE
(Longeron Yoke)

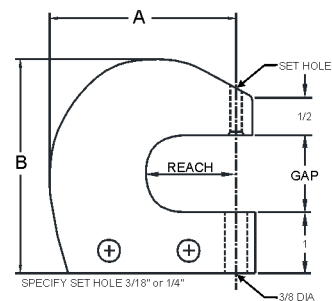

* Above four types of yoke are optional for AT-2703 and AT-2704

Model No.	Rivet Capacity Diameter		Standard Yoke Dimensions		Max force with 90psi (6.2 bar) air pressure	Set Holder		Overall length	Weight with Yokes
	Alum	Steel	Reach	Gap		Max Travel	Stroke at Max power		
AT-2701	3.2mm	2.4mm	38.1	-	3000 lb	15.90mm	1.3mm	230mm	1.70 kg
AT-2701L	2.4mm	1.6mm	76.2	-	1800 lb	19.05mm	1.3mm	270mm	2.10 kg
AT-2702	4.8mm	4.0mm	38.1	-	6000 lb	15.90mm	1.3mm	240mm	2.20 kg
AT-2702L	3.2mm	2.4mm	76.2	-	4100 lb	19.05mm	1.3mm	280mm	2.50 kg
AT-2703	3.2mm	2.4mm	38.1	32	3000 lb	14.30mm	1.3mm	260mm	2.04 kg
AT-2704	4.8mm	4.0mm	76.2	32	6000 lb	14.30mm	1.3mm	356mm	2.49 kg

Model No.	Reach	Gap	"A"	"B"
A TYPE	1.5"	1-1/4	3-1/4	3-3/4
B TYPE	3"	1-1/4	4-3/4	3-3/4
C TYPE	4"	1-1/4	6-1/4	3-3/4
D TYPE	2.5"	1-1/4	4	4

L : long reach alligator jaw type